



Mobile Temperature Measurement Terminal

TPS350T

Non-contact Temperature Measurement

Distance : 0 ~10cm
Time : <1s
Range : 32 ~ 42.9 °C
Accuracy : ± 0.3 °C

Rapid Body Temperature Screening


Voice Prompt / High Temperature Alarm

Personnel Information Associations and Binding

ID Card / Passport / QR Code

Streamline Processes and Reduce Cross-infection

Paperless + Visualization + Cloud Data Management

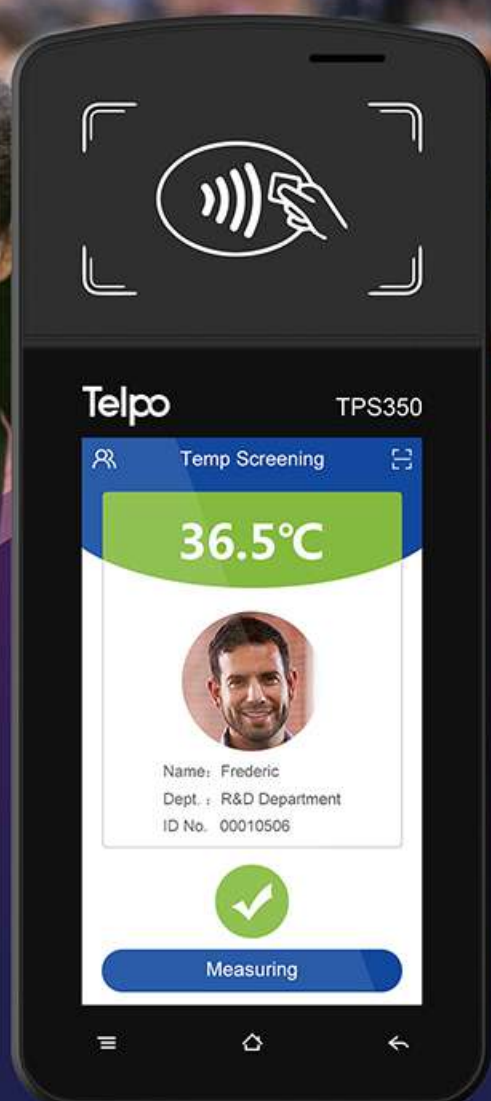

Android



LTE



Wi-Fi



Temperature Measurement



NFC



QR Code



Telpo Cloud

TPS350T

Mobile Temperature Measurement Terminal

Specification	
OS	Android 7.1 or above
Processor	Quad-Core 1.1GHz or above
Memory	1GB DDR, 8GB eMMC, Ext. TF card slot 2GB DDR, 16GB eMMC (Optional)
Display	4-inch, 480*800
Smart Card Reader (Optional)	ISO7816
Contactless Card Reader (Optional)	ISO14443 Type A/B, Mifare, ISO18092 compliant
Temperature Measurement	Method : Non-contact Distance : 0 ~10cm Time : <1s Range : 32 ~ 42.9 °C Accuracy : ± 0.3 °C
Camera (Optional)	5MP, auto focus Barcode software decoding (Optional)
SIM Slots	1 SIM 2 SIMs (Optional) 1 SIM+1 SAM (Optional)
Communications	LTE/WCDMA/GPRS/WiFi/Bluetooth
GPS (Optional)	Built-in
Peripheral Ports	1 Micro USB, 1 DC Charge, 1 Audio Jack
Audio	Digital Audio Speaker, Microphone
Power Supply	5V/2A
Battery	3.8V/3000mAh, Li-ion
Dimensions (mm)	168 (L)*75 (W)*24 (H)
MDM (Optional)	Mobile Device Management
Certification	CE, RoHS

Note: Reserve the right to change the parameters without prior notice.

Accessories (Optional)



Spare Battery



Screen Protector



Carrying Bag

Application



Enterprise



Community



School



Restaurant



Checkpoint

Telepower Communication Co.,Ltd.

E-mail: business@telpo.com Skype: [telpo_business](https://www.skype.com/name/telpo_business)

Web: www.telpo.com.cn

Add: Foshan City, Guangdong Province, China

