


Telpo F8


Face Recognition Terminal

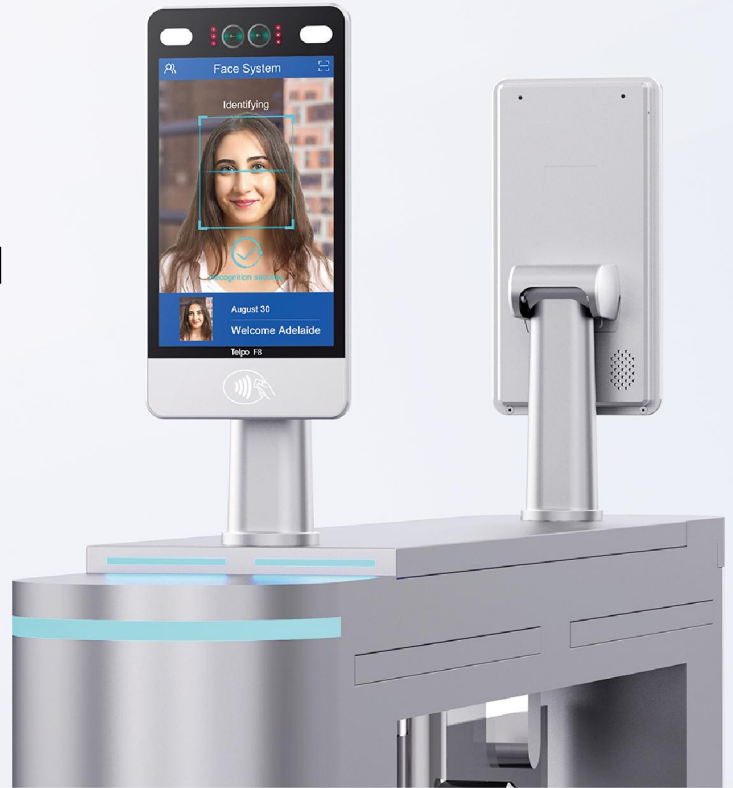

Dual-lens Face Recognition Camera

Reliable recognition in all lighting conditions with infrared technology

- Maximum **30,000** registered users
- **0.01%** FAR
- **4%** FRR

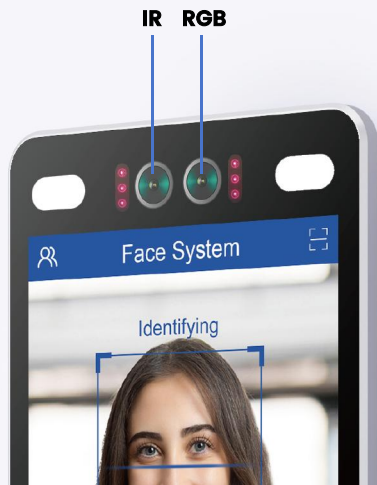

Liveness Detection

Anti-spoofing technology prevents fraud from photos or videos

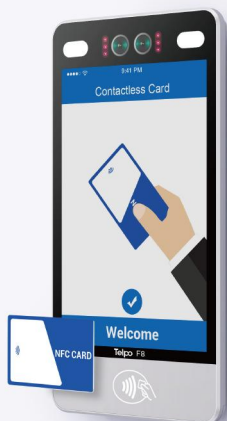


Photo detection

Live detection

Built-in NFC Reader

For flexible access control options




Flexible Installation

Turnstile Mount Bracket



Wall Mount Bracket



F8 Face Recognition Terminal

Applications



Office



Airport



Event Entrance

Specifications

OS	Android 11	Peripheral Ports	1 DC Port 1 RJ45 1 Micro USB 1 Wiegand Input 1 Wiegand Output 1 RS485 1 RS232 1 Relay 1 USB Type A 1 Reset
Processor	Hexa-Core 1.8GHz	Power Supply	12V/2A
Memory	4GB RAM, 64GB ROM	※ Bracket	Wall Mount Bracket Turnstile Mount Bracket
Display	8", 800*1280	Dimensions (mm)	249 (L)*127 (W)*23 (H)
Front Camera	Dual-lens Camera (RGB+IR), 2MP+1.3MP	Environmental	Operating temperature: -20°C ~ 55°C Storage temperature: -25°C ~ 60°C
Fill Light	White LED	※ MDM	Mobile Device Management
Contactless Card Reader	ISO14443 Type A/B, Mifare	Certification	CE, KC, TELEC, JATE, IP66
Communications	Ethernet/Wi-Fi/Bluetooth		
Audio	Digital Audio Speaker, Microphone		

※Optional Datasheet may be revised or amended by product specs.

Telpo Technology Co., Ltd.

🌐 www.telpo.com.cn ✉ business@telpo.com ☎ +86 18603080594 📍 Foshan City, Guangdong Province, China

©Copyright 2026 Telpo Technology Co., Ltd. All Rights Reserved.

VersionVersion 1.0 Latest Updated on January 6, 2026

