
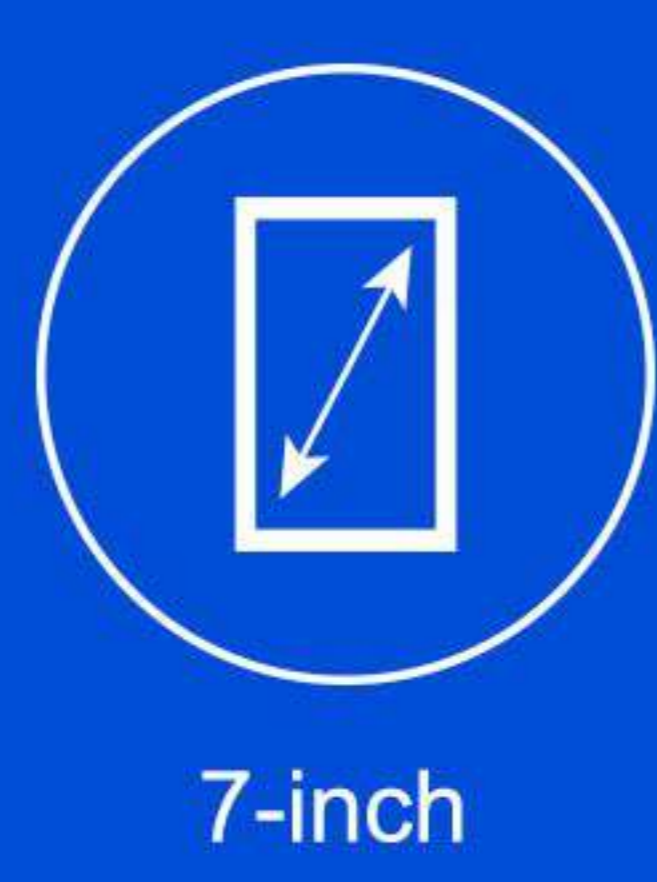
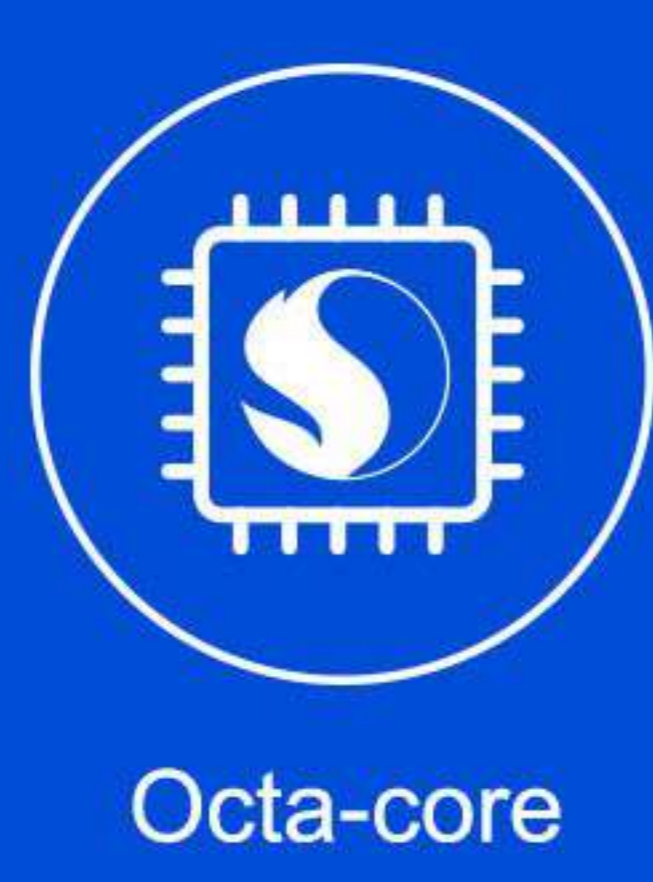
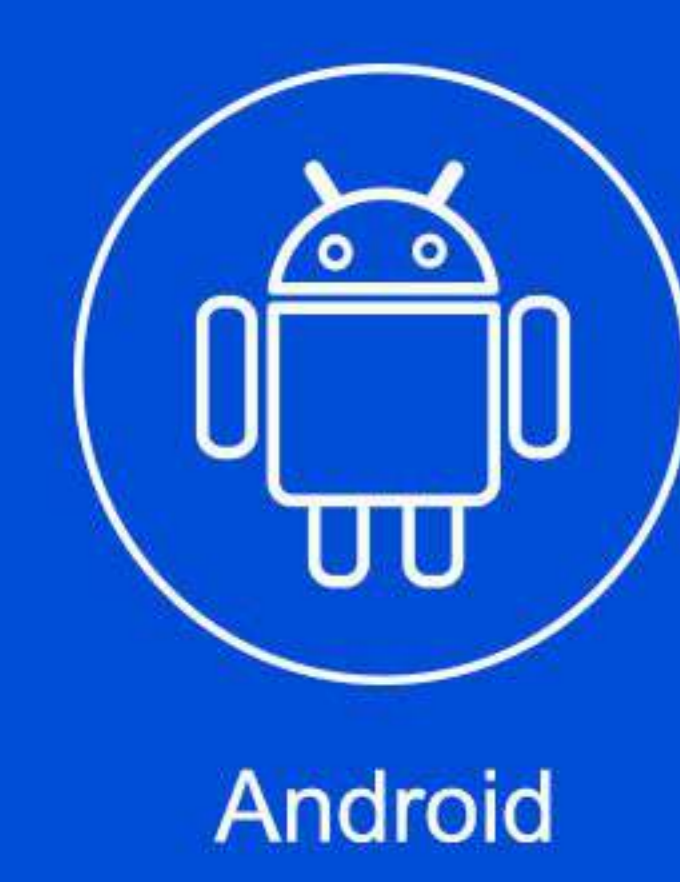


# Telpo | F67

## Video Door Phone

Building Access Control System

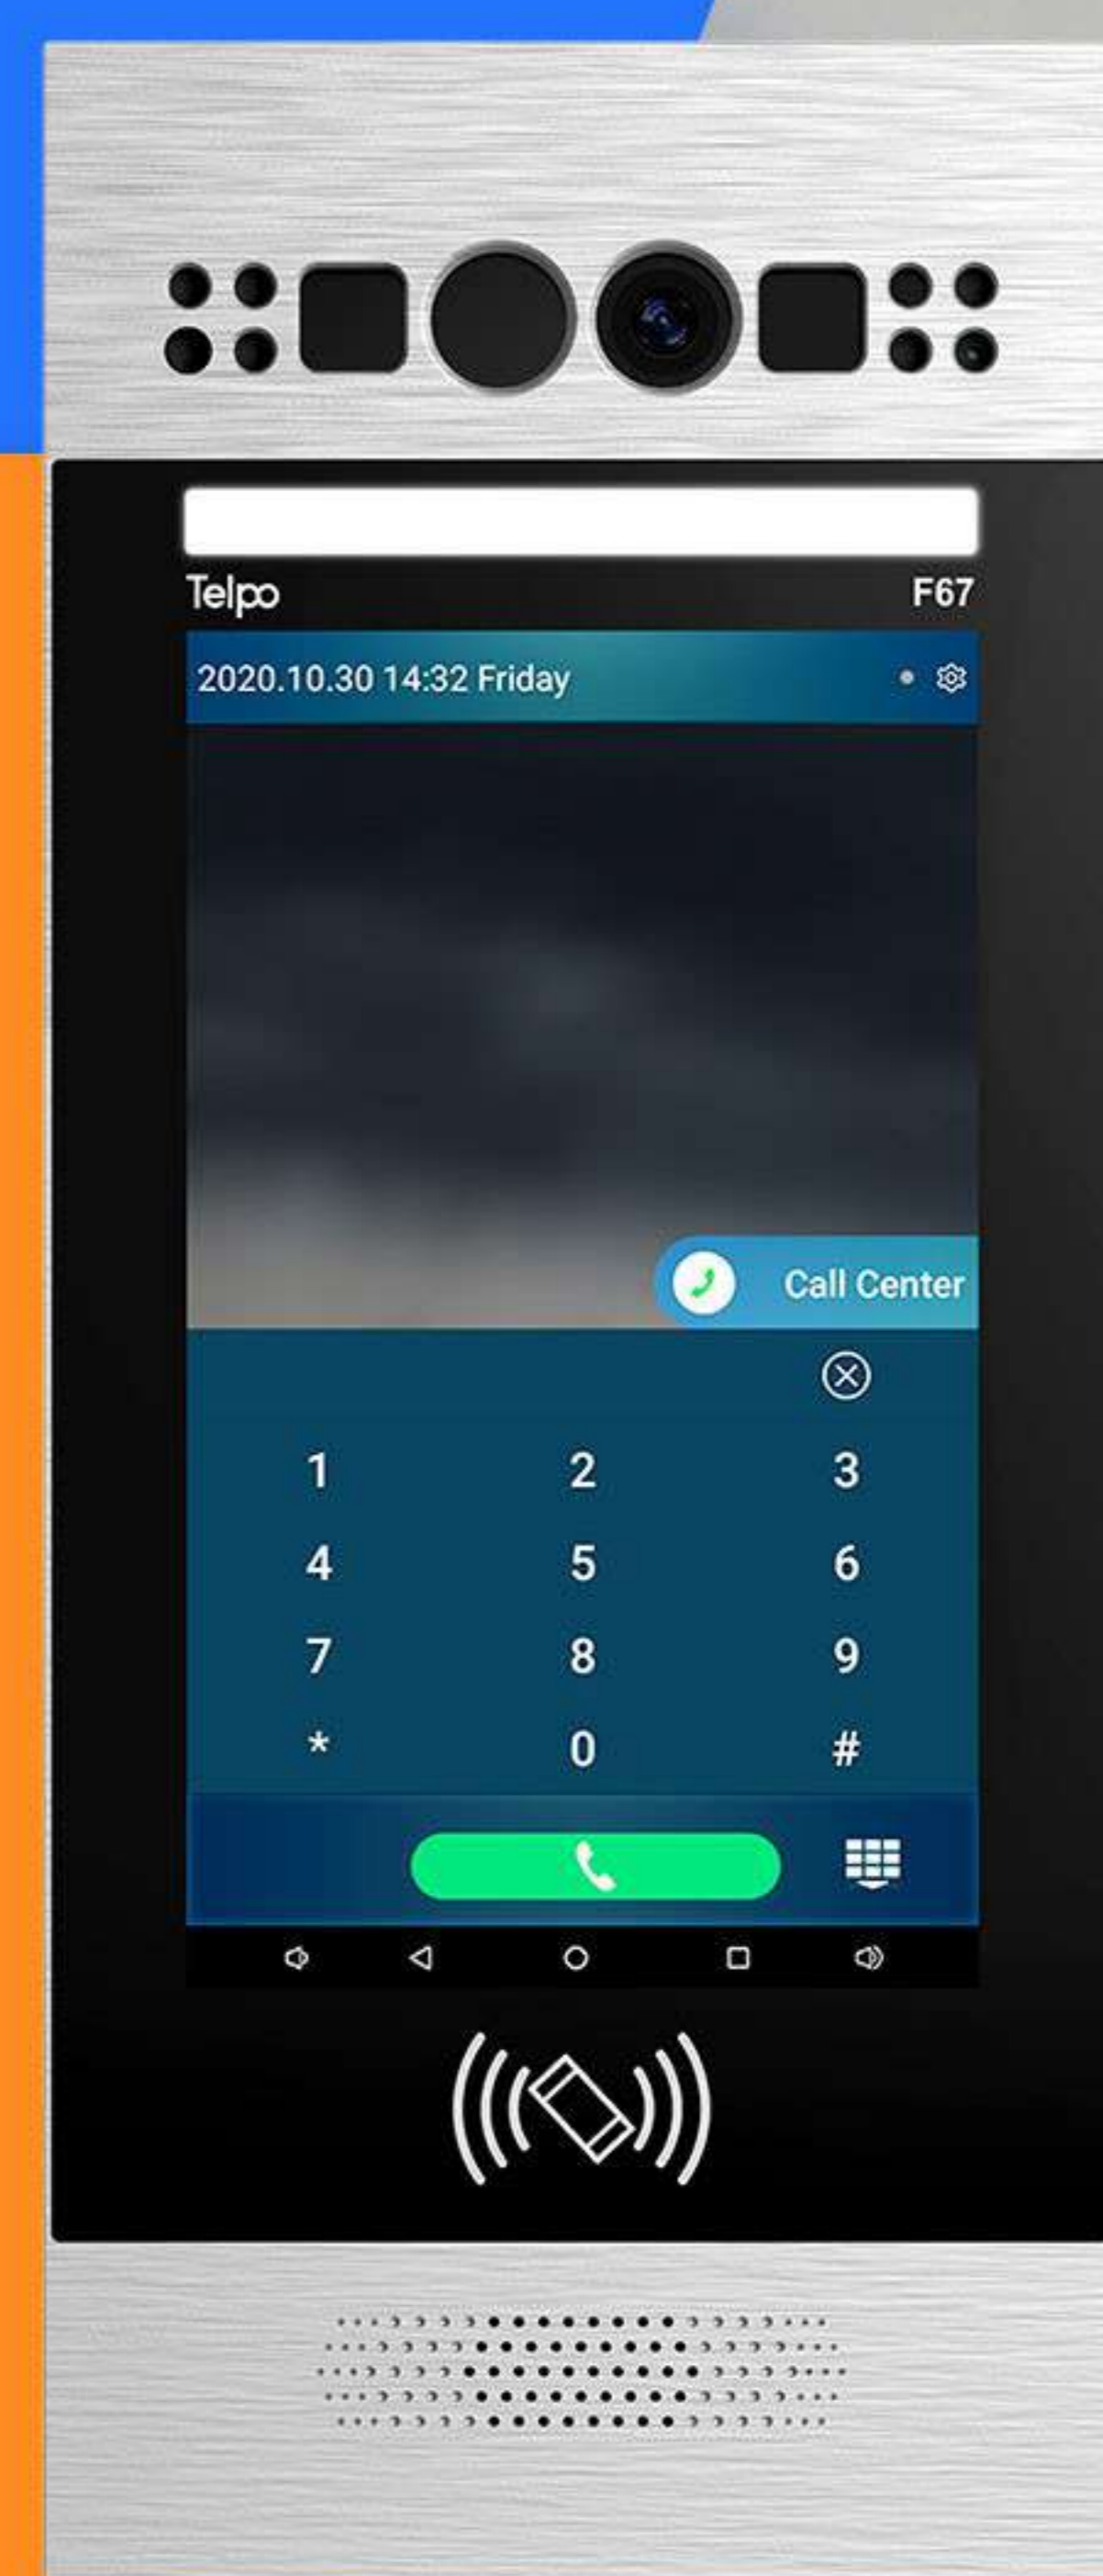


# F67

Video Door Phone

Specification	
OS	Android 8.1
Processor	Octa-Core 2.0GHz
Memory	2GB DDR, 16GB eMMC
Display	7-inch, 600*1024
Camera	Dual-lens Camera (RGB+IR), 2MP+2MP
Fill Light	White LED
Intercom	Support
Contactless Card Reader	ISO14443 Type A, Mifare (Optional) 125KHz ID Card (Optional)
Communications	Ethernet POE (Optional)
Peripheral Ports	1 DC, 1 Micro USB, 1 RJ45, 1 Wiegand, 1 RS485(half-duplex), 3 Relay
Audio	Digital Audio Speaker, Microphone
Power Supply	12V/2A
Bracket	Wall Mount Bracket
Dimensions (mm)	307(L)*130(W)*30(H)
Environmental	Operating temperature: -20°C ~ 55°C Storage temperature: -25°C ~ 60°C
IP Protection	IP65

Note: Reserve the right to change the parameters without prior notice.

### Details

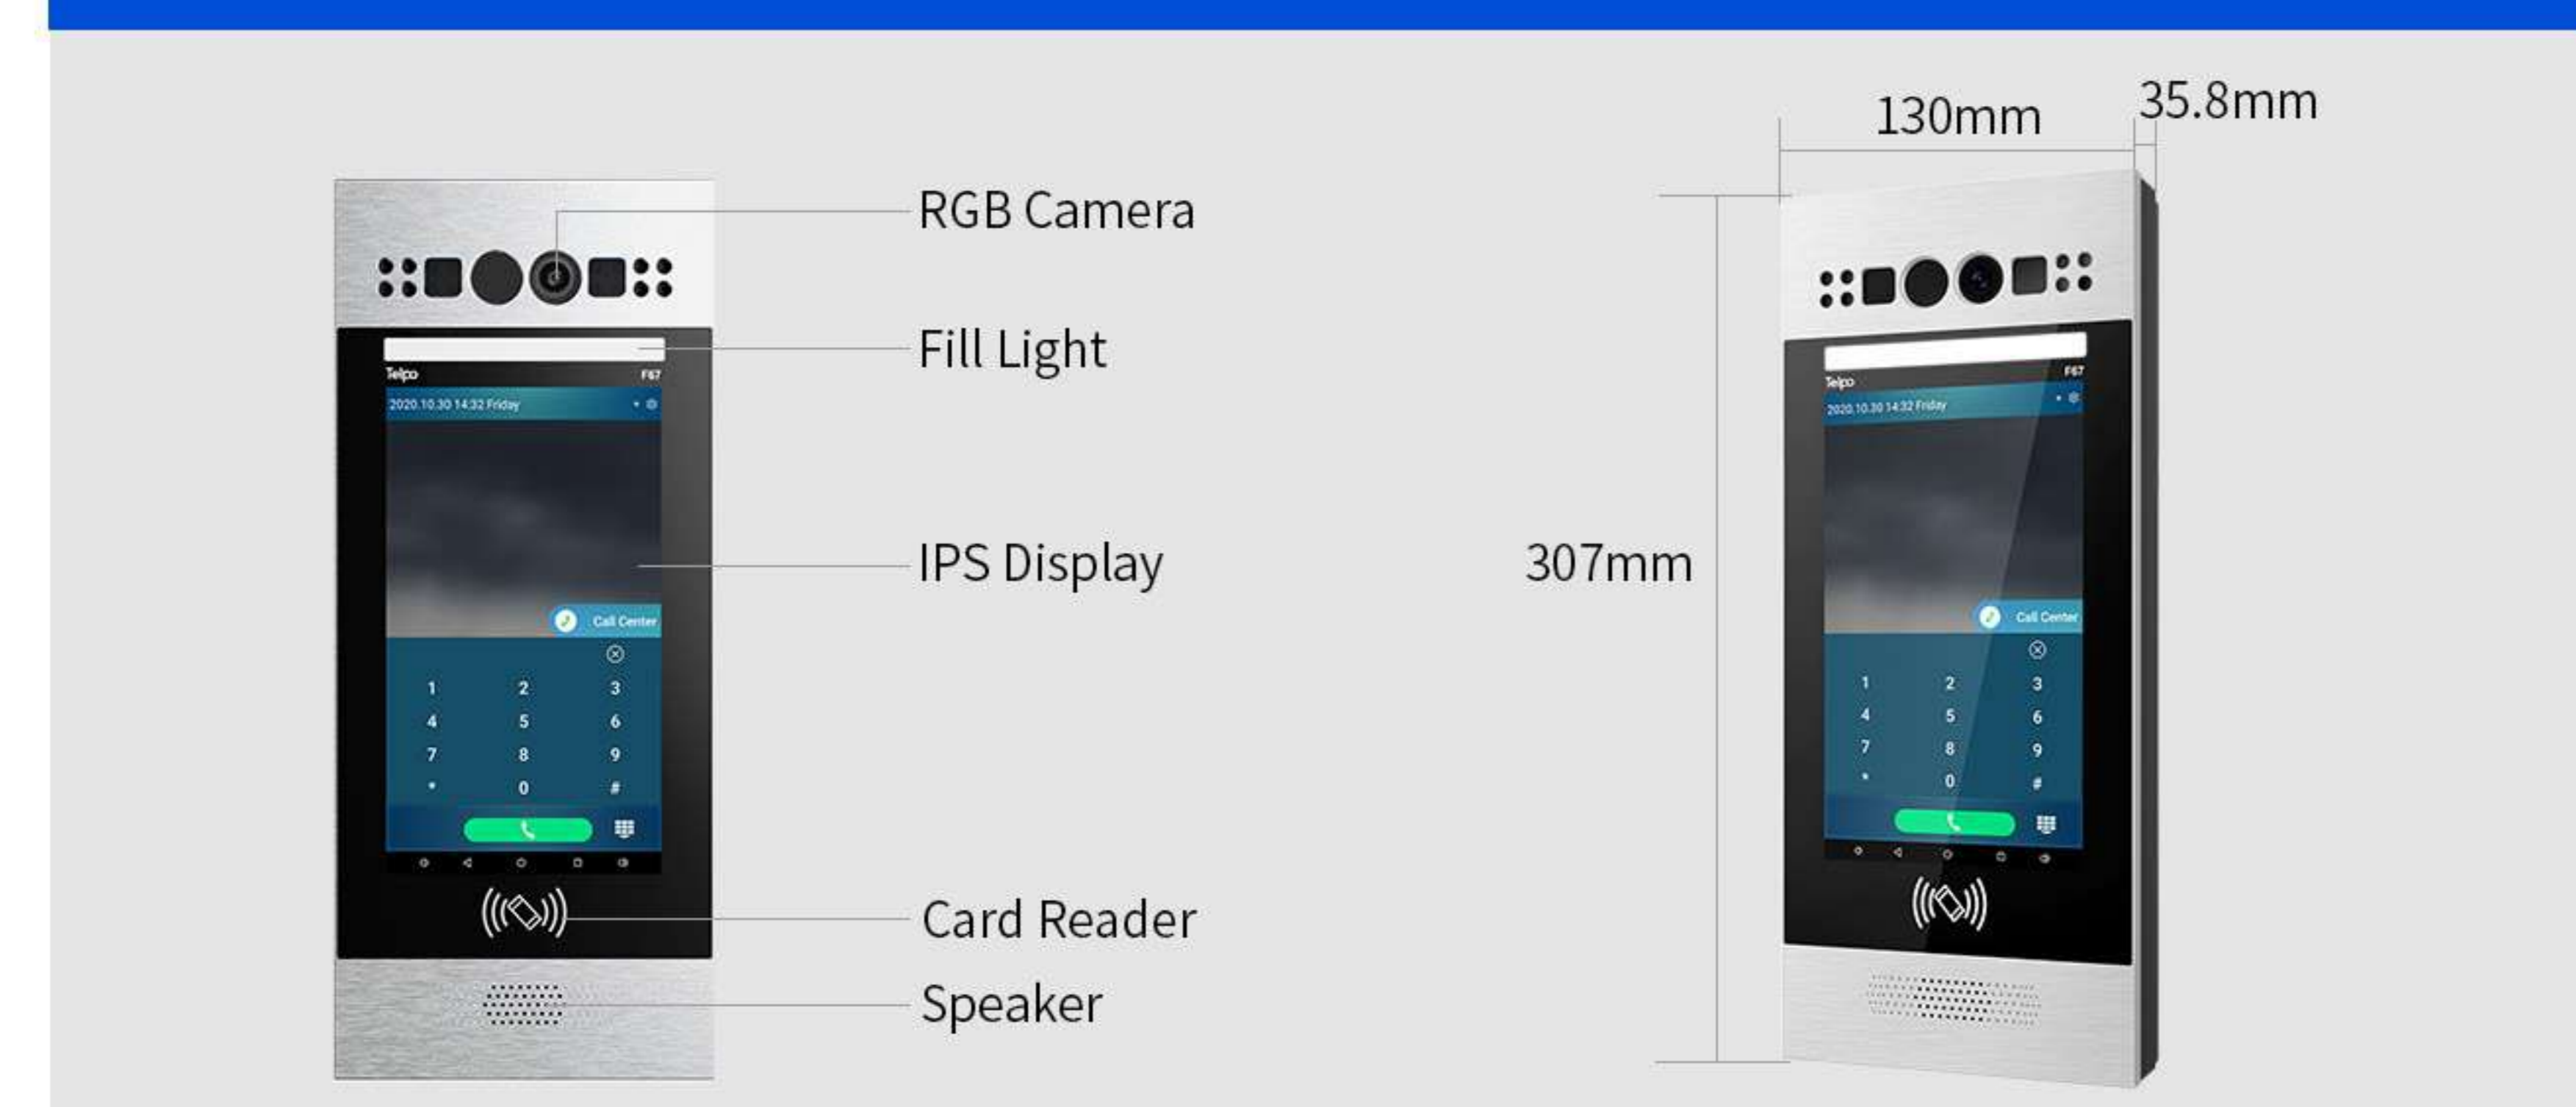

## Telepower Communication Co.,Ltd.

E-mail: [business@telpo.com](mailto:business@telpo.com)  
 Skype: [telpo\\_business](https://www.skype.com/name/telpo_business)  
 Web: [www.telpo.com.cn](http://www.telpo.com.cn)  
 Add: Foshan City, Guangdong Province, China



© Copyright 2021 Telepower Communication Co., Ltd. All Rights Reserved.

### Application

